




5120R-66

PE Splicing Tape

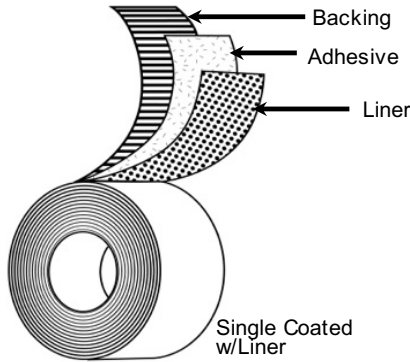

- Backing:** LDPE Film
- Adhesive:** Acrylic (R412)
- Liner:** 70# Clay Coated Kraft Paper - Backslit
- Colors:** Green
- Specifications:** N/A

- Size Options:** Incremental widths 1/4" - 54" x 180ft

Applications

- Splicing low surface energy films such as those that contain slip agents and odor enhancers

Features

- LDPE Film
- Acrylic Adhesive
- 70# Clay Coated Kraft Liner

Benefits

- Bright color for high visibility splices
- Conformable
- Aggressive adhesion to PE film
- Tears film substrates upon removal
- Backslit for easy removal

Typical Test Values

	Standard UOM		Metric UOM		Test Method
Total Thickness	4.7	mils	0.119	mm	PSTC-133
Substrate Thickness	3.5	mils	0.089	mm	PSTC-133
Adhesion to Steel	25	oz/in	2.74	N/cm	ASTM D-3330
Tensile Strength	7	lb/in	12.26	N/cm	ASTM D-3759
Elongation	400%				
Application Temperature	50 to 120 °F		10 to 49 °C		
Operating Temperature	-40 to 120 °F		-40 to 49 °C		

Recommended Storage Conditions: 40-60% Humidity, 60 - 80 °F

Standard Shelf Life (at 25 °C): 12 months from shipment date

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY GLOBAL'S knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.



25 Forge Pkwy Franklin, MA 02038
 1-800-343-7875 Fax 1-800-328-4822
 www.berryglobal.com
 10/8/17