


Differential Double-Coated Scrim Tape

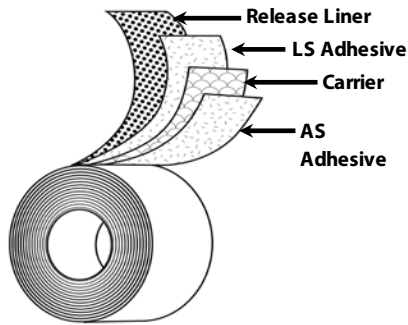

Carrier: Cloth
Adhesive: Rubber (Clear)
Liner: Polypropylene Film
Colors: Clear
Specifications: N/A
Standard Sizes: 48mm x 55m

Applications

- Clean removal mounting and bonding for signs, placards, OEM components, and assembly
- Secure sheeting for flooring/carpet protection protection
- Core starter and splicing applications

Features

- Cloth reinforcement
- Differential Rubber-Based Adhesive
- PP Release Liner

Benefits

- Good strength and elongation for easy tear, application and removal
- Conformable and moisture resistant
- Air-side adhesive removes cleanly from most surfaces
- Aggressive, high tack adhesive on the liner side bonds to difficult surfaces
- Hand tearable
- Easy to use

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	6.0 mils	0.15 mm	ASTM D-1000
Adhesion to Steel (LS)	55 oz/in	6.0 N/cm	PSTC-101
Adhesion to Steel (AS)	35 oz/in	3.8 N/cm	PSTC-101
Tensile Strength	19 lb/in	33.3 N/cm	ASTM D-1000
Operating Temperature	40 to 200 °F	4 to 93 °C	

Recommended Storage Conditions: 32-90 °F at 50% RH ± 2%

Standard Shelf Life (at 25 °C): 24 months from date of manufacture.

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.