




502A-53

Clear Polyethylene Tape

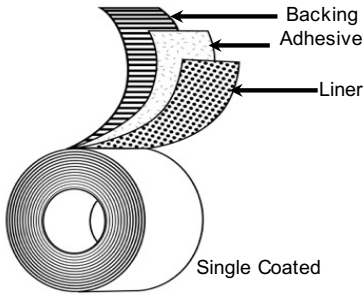

- Backing:** LDPE Film
- Adhesive:** Acrylic (A100)
- Liner:** 53# Coated Kraft
- Colors:** Clear
- Size Options:** Incremental widths 1/4" - 54" x 108ft
Easy-Tear Version and Master Rolls Also Available

Applications

- General purpose sealing
- Splicing and seaming
- Indoor surface protection
- Bondbreaker tape
- Temporary hold down
- Material processing
- Industrial fabricating applications

Features

- LDPE Film
- Acrylic Adhesive

Benefits

- Conformable for irregular surfaces
- Transparent for less visible repairs and easy inspection
- Excellent moisture barrier properties
- High adhesion and cohesion
- Excellent high and low temperature performance
- Will not crack or crease
- Permanent bond with virtually no edge bleed
- Excellent long-term stability

Typical Test Values

	Standard UOM		Metric UOM		Test Method
Total Thickness	5.5	mils	0.140	mm	PSTC-133
Substrate Thickness	4.5	mils	0.114	mm	PSTC-133
Adhesion to Steel	50	oz/in	5.47	N/cm	ASTM D-3330
Tensile Strength	11	lb/in	19.26	N/cm	ASTM D-3759
Elongation	400%				
Application Temperature	50 to 120 °F		10 to 49° C		
Operating Temperature	-40 to 190 °F		-40 to 88 °C		

Recommended Storage Conditions: 40-60% Humidity, 60 - 80 °F
Standard Shelf Life (at 25 °C): 12 months from shipment date

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY GLOBAL'S knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.



25 Forge Pkwy Franklin, MA 02038
1-800-343-7875 Fax 1-800-328-4822
www.berryglobal.com

11/28/17